

QUIET, POWERFUL, EFFICIENT

ProMax Garden Classic – garden pumps

Powerful irrigation

In two capacity levels with 3000 and 4500 litres per hour

Effectively on the move

Ergonomic and extremely stable handle for comfortable carrying

Small & compact

Easy filling

With separate fill opening on top

Suitable for tools

Chrome-plated metal screw for easy opening with tools, without danger of breaking, even if the thread has “seized”




Self-priming

With an efficient injector the pump sucks water within the shortest time possible to a height of 8 m

Well-secured

Thermal dry-run protection

PRODUCT DETAILS

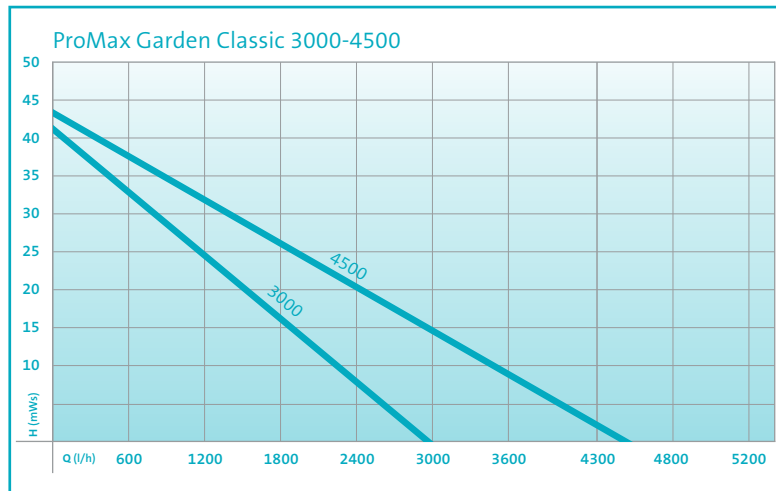

Extras

Top product characteristics

Outstanding quiet operation

- Thanks to grey cast iron hydraulic housing

Irrigate efficiently

- Attractive ratio of delivery capacity to water pressure and power consumption (4.1 bar, 3000 l/h and approx. 600 W or 4.4 bar, 4500 l/h and approx. 900 W)

Practical

- The toggle switch in blue on top is easy to see, and easy to reach from all sides.

PROMAX GARDEN CLASSIC Technical data



Model	3000	4500
Flow rate – Q max.	3,000 l/h	4,500 l/h
Delivery head – H max.	41 m	44 m
Pressure – max.	4.1 bar	4.4 bar
Power consumption	600 W	900 W
Rated voltage	230 V / 50 Hz	230 V / 50 Hz
Guarantee G (+request guarantee)* p. 66	2+1 years	2+1 years
Self-priming suction head – max.	8 m	8 m
Pump mechanism	Jet	Jet
Automatic function	No	No
Suction line / pressure line	1" (30.9 mm)	1" (30.9 mm)
Sprinkler connection capacity / max. hose length per sprinkler**	2x / 25 m 1x / 50 m	3x / 25 m 3x / 50 m
Power cable length	1.5 m	1.5 m
Protection class	IP 44	IP 44
Net weight	8.2 kg	9.2 kg
Dimensions (L x W x H)	354 x 180 x 251 mm	364 x 180 x 251 mm
Stockist PU	1 unit	1 unit
Item number (GB-Version)	43120	43121
Item number	43118	43119

** Basis on which data was determined: Water requirement at the sprinkler: 600 l/h, pressure requirement at the sprinkler: 2.0 bar, geodetic height differential, total: 5 m. Use of 3/4" hoses (19 mm).